


LISTBEL-FLAT-O C17 400

Nastri in gomma | Rubber conveyor belts



dimensioni listelli | chevrons dimensions

| | UM | Valore Value |
|----------|----|----------------|
| A | mm | 1000 |
| B | mm | 630 |
| C | mm | 185 |
| D | mm | 330 |
| E | mm | 20 |
| F | mm | 17 |
| α | ° | 90 |

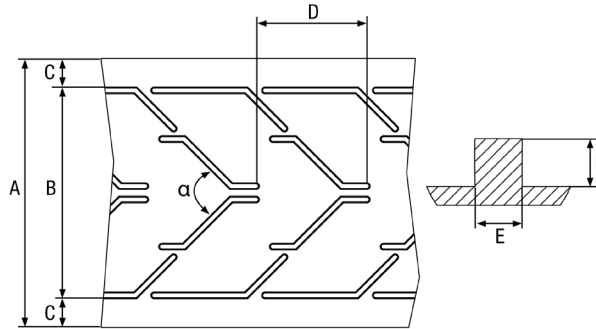

specifiche tecniche | technical specifications

| | um | norme norms | valore value |
|---|-------------------|---------------|----------------|
| peso weight | kg/m ² | | 10 |
| carico di rottura tensile strength | kg/cm | DIN 22102 | 400 |
| adesione coperture adhesion between covers | N/mm | DIN 22102 | ≥ 4,5 |
| adesione tela-tela adhesion ply-to-ply | N/mm | DIN 22102 | ≥ 5 |
| diametro tamburo motore motor pulley diameter | mm | | 350 |
| diametro tamburo di coda tail pulley diameter | mm | | 300 |
| numero tele number of plies | n° | DIN 22102 | 3 |
| composizione tessuto fabric composition | | DIN 22102 | EP 125 |
| rigidità trasversale cross rigid | | | No |

dimensioni | dimensions

| | um | norme norms | valore value |
|---|----|---------------|----------------|
| spessore copertura superiore top cover thickness | mm | DIN 22102 | 3 |
| spessore copertura inferiore bottom cover thickness | mm | DIN 22102 | |
| spessore thickness | mm | DIN 22102 | 6,5 |

lunghezza | length

specifiche delle coperture | cover specifications

| | um | norme norms | valore value |
|--|-------------------|---------------|----------------|
| durezza hardness | SH/A | | 65 |
| carico di rottura tensile strength | N/mm ² | DIN 22102 | 14 |
| allungamento a rottura elongation at break | % | DIN 22102 | 350 |
| perdita abrasione abrasion loss | mm ³ | DIN 22102 | 250 |

Tabella tolleranze | table tolerances

| | da | a | Um | tolleranza tolerance |
|--------------------|----|---|------|------------------------|
| durezza hardness | - | - | SH/A | ±5 |



valid from 07/05/2026

